



Basin modeling: the key for gas shale GIIP assessment

Schneider Frederic (BeicipFranlab), Laigle Jean-Marie (BeicipFranlab), Piriou (BeicipFranlab), Callie Marie (BeicipFranlab)

Copyright 2008, ACGGP.

This paper was selected for presentation by an ACGGP Technical Committee following review of information contained in an abstract submitted by the author(s).

Summary

The objective of this paper is to demonstrate how a basin modeling study can help in the evaluation of unconventional shale gas / oil resources. We present an improved expulsion-retention model that accounts for the evolution of retention capacity as a function of maturity. Basin modeling is indeed key tools to help in 1) the evaluation of the initial organic matter distribution, type and quality inside a formation, and 2) the assessment of the present day total organic content (TOC) and maturity level of the formation. These two parameters have a first order control on the volume of hydrocarbons generated and still retained in the formation.

A basing modeling based methodology has been designed to allow estimating the hydrocarbons retention capacity of the formation and the composition of hydrocarbons still retained.

Introduction

Hydrocarbons are generated from kerogen during the source rock burial thanks to an elevation of the temperature. As for the gas, it can be either of biogenic origin (generated at low maturity), or of thermogenic origin (generated from the cracking of kerogen and oil at higher maturity level).

Part of the gas / oil generated is expelled from the source rock and then migrates to conventional reservoir through carrier beds. The other part is retained by the source rock. Hydrocarbons composition and volumes generated and retained depend on the initial organic matter properties and maturity. Expulsion model in the past have been designed in order to quantify the expelled amounts. These models have to be revisited and improved in order to better quantify the retained gas/oil.

The source rock retention capacity is tightly linked to the TOC content, the organic matter type and the maturity. Hydrocarbons can be stored in source rocks by adsorption (this process concerns mainly the gas) and as free hydrocarbons inside the porosity.

The porosity in mature source rock can be of two types (Figure 1): 1/ an effective porosity inside the non-organic fraction of the rock. The evolution of this porosity vs. depth is controlled by burial and possible diagenetic phenomena and 2/ porosity inside the organic matter itself. This second porosity is created consequently to the loss of kerogen mass resulting of the transformation of organic matter into hydrocarbons. It is

assumed that the organic porosity is poorly connected to the non-organic effective porosity as the pore threshold size in this organic porosity is believed to be of the nanometer order of magnitude. These two different porosities represent a storage place for hydrocarbons in the source rock

Workflow

To assess the potential for shale gas/oil in a formation, and as the volume and quality of hydrocarbons generated depends on the initial geochemical parameters of the formation and the maturity evolution through time, it is so necessary to evaluate:

- The initial TOC, the organic matter distribution, type and quality;
- The source rock present day maturity;
- The storage capacity in the non-organic porosity, the organic porosity and the adsorption;
- The generated HC quantity and quality, in order to quantify how much is retained in the source rock intervals, in the porosity or by adsorption.

In order to achieve these tasks, a numerical basin model of the area of interest is built. This model, carefully calibrated in temperature, maturity and pressure against the available data, is used as a framework to compute an evaluation of the shale gas potential of the considered formation.

The initial TOC and kerogen initial HI are inverted from present day values. The present day TOC is deduced from logs using an improved Carbolog® methodology, which combines sonic and resistivity logs (Carpentier et al, 1991; Schneider et al, 2010). For thick formations, or if the source rock is not well known, a forward stratigraphic model, such as Dionisos®, can help in assessing the source rock extent and its internal sedimentary architecture.

The geochemical study, and especially the analysis of the Rock Eval® data, enables to define the kerogen type and quality and helps in selecting a relevant kinetic scheme. The basin model, calibrated in maturity, allows estimating the transformation ratio of the kerogen, which is used to calculate the initial TOC from the present day TOC.

Compositional kinetic parameters for kerogen thermal decomposition are key elements in this kind of study to predict the hydrocarbons fluids quality and type as a function of maturity. IFP kinetics schemes have proven to be effective for representing correctly kerogen transformation into oil and gas (Behar et al., 1997, 2008). They provide reactions scheme, able to predict early or late gas. They have been successfully

applied to Barnett and Posedonia shales (Behar & Jarvie 2011). A solution for modeling biogenic gas has also been proposed (Schneider et al, 2010, in press).

The modeling of hydrocarbons generation allows estimating the mass loss in the kerogen and the organic porosity consequently created as a function of maturity.

The adsorption represents also a very efficient way to retain important volume of hydrocarbons inside the source rocks, especially gas, as the density of the adsorbed layer is much higher than the density of the free hydrocarbons phase in bottom conditions. The adsorption capacity of the rock is modeled as a function of TOC, pressure and temperature through Langmuir isotherms that are calibrated from lab experiments. The gas adsorption potential on organic material is then calculated using a modified-Langmuir model implemented within the basin simulator which takes into account spatial distribution of pressure, temperature, and remaining TOC.

The effective porosity in the shale matrix is estimated from log analysis, using a methodology that allows correcting the log response from the effect of organic matter.

The integration of these tasks allows estimating the retention capacity of the formation, accounting for shale effective porosity, organic porosity and adsorption capacity. This retention capacity depends primarily of the TOC distribution and the TOC decreases with maturity.

The Gas Initially in Place (GIIP) can then be directly deduced from the basin modeling simulation results, as a function of this retention capacity. The numerical model computes a GIIP value at play scale and gives also access to lateral and vertical variations of gas distribution, depending on the resolution of the source rock architecture implemented in the model.

Using experimental design and response surface-based methodology, the calculated GIIP may be risked as a function of the uncertainty associated to the values of some key input parameters. GIIP percentiles are then computed (P10, P50 and P90).

Discussion

The methodology illustrated in Figure 3 has been successfully applied in a number of formations over the world, including Silurian in Algeria, Abu Gabra formation in Sudan, Los Monos formation in Argentina, or Lower Barnett unit in the Fort Worth Basin (Romero-Sarmiento et al., 2012). More recently the unconventional Eagle Ford - Tampico Basin has been evaluated.

Most of the formations studied present significant differences with US plays, in terms of thickness, organic matter type, present day TOC, adsorbed gas proportion, volume of gas per ton of rock.

The methodology (see Figure 2 and Figure 3) presented allows estimating the hydrocarbons retention capacity of the formation and the composition of hydrocarbons still retained. Our experience proves that these properties can vary significantly laterally and vertically, and that the shale gas potential of a formation can then not be simply deduced from

a local evaluation that would be extrapolated throughout the basin. Shale development presents huge opportunity and faces large geological uncertainty. Innovative tools and methods are keys to diminish the geological risk from resource evaluation to optimal well development.

Basin modeling can play a key role in the shale evaluation process as it allows integrating all available knowledge into a consistent and comprehensive model of the studied area, from early stages of exploration to pilot zone identification. Large research effort is still required to understand and to quantify the physical processes that occur in shales and organic matter, such as: retention, adsorption, and diffusion.

In particular, a new “ready to use” method of analysis and interpretation for the Rock-Eval 6 device for better assessment of free or sorbed hydrocarbons in unconventional shale plays. This method allows a better quantification of free and/or sorbed hydrocarbons as well as a more accurate determination of the Rock-Eval Tmax maturity parameter (Romero-Sarmiento et al, 2016).

References

- Behar, F. and D. Jarvie, 2011, Compositional modeling of gas generation from two shale gas resource systems: Mississippian Barnett Shale (USA) and Lower Jurassic Posidonia Shale (Germany), *Hedberg Research Conference*.
- Behar, F., M. Vandenbroucke, Y. Tang, F. Marquis, and J. Espitalie, 1997, Experimental cracking of kerogen in open and closed systems: determination of kinetic parameters and stoichiometric coefficients for oil and gas generation: *Organic Geochemistry*, v. **26**, p. 321–339
- Béhar F., F. Lorant, and L. Mazeas, 2008, Elaboration of a new compositional kinetic scheme for oil cracking: *Organic Geochemistry*, v. **39**, p. 764-782.
- Carpentier, B., A. Huc, and G. Bessereau, 1991, Wireline 550 logging and source rocks. Estimation of organic carbon by the CARBOLOG method, *The Log Analyst*, May–June, 1991, p. 279–297.
- Loucks R., R. M. Reed, S. C. Ruppel, and D. M. Jarvie, 2009, Morphology, Genesis, and Distribution of Nanometer-Scale Pores in Siliceous Mudstones of the Mississippian Barnett Shale: *Journal of Sedimentary Research*, v. **79**, p. 848-861.
- Romero-Sarmiento M.F., M. Ducros, B. Carpentier, F. Lorant, S. Rohais, I. Moretti, and A.Y. Huc, 2012, Predicting TOC, Organic Porosity and Gas Retention Distribution in a Shale-Gas System Using Petroleum Basin Modelling: *Search and Discovery Article #40973*.
- Romero-Sarmiento M.F., Pillot D., Letort G., Lamoureux-Var V., Beaumont V., Huc A.Y. and B. Garcia, 2016, New Rock-Eval Method for Characterization of Unconventional Shale Resource Systems, *Oil & Gas Science and Technology – Rev. IFP Energies nouvelles* (2016) **71**, 37.
- Schneider, F. J. S., J. A. Noya, and C. Magnier, 2010, Model of low-maturity generation of hydrocarbons applied to the Carupano Basin, Offshore Venezuela, in K. Peters, D. Curry, and M. Kacwicz, eds., Basin and Petroleum System Modeling: 2009 *Napa Hedberg Conference: Hedberg Series No. 4*, p. 1–19.
- Schneider F., Dubille M., and L. Montadert (in press). Modeling of Microbial Gas Generation: Application to the Eastern Mediterranean “Biogenic Play”. *Geologica Acta Journal*.

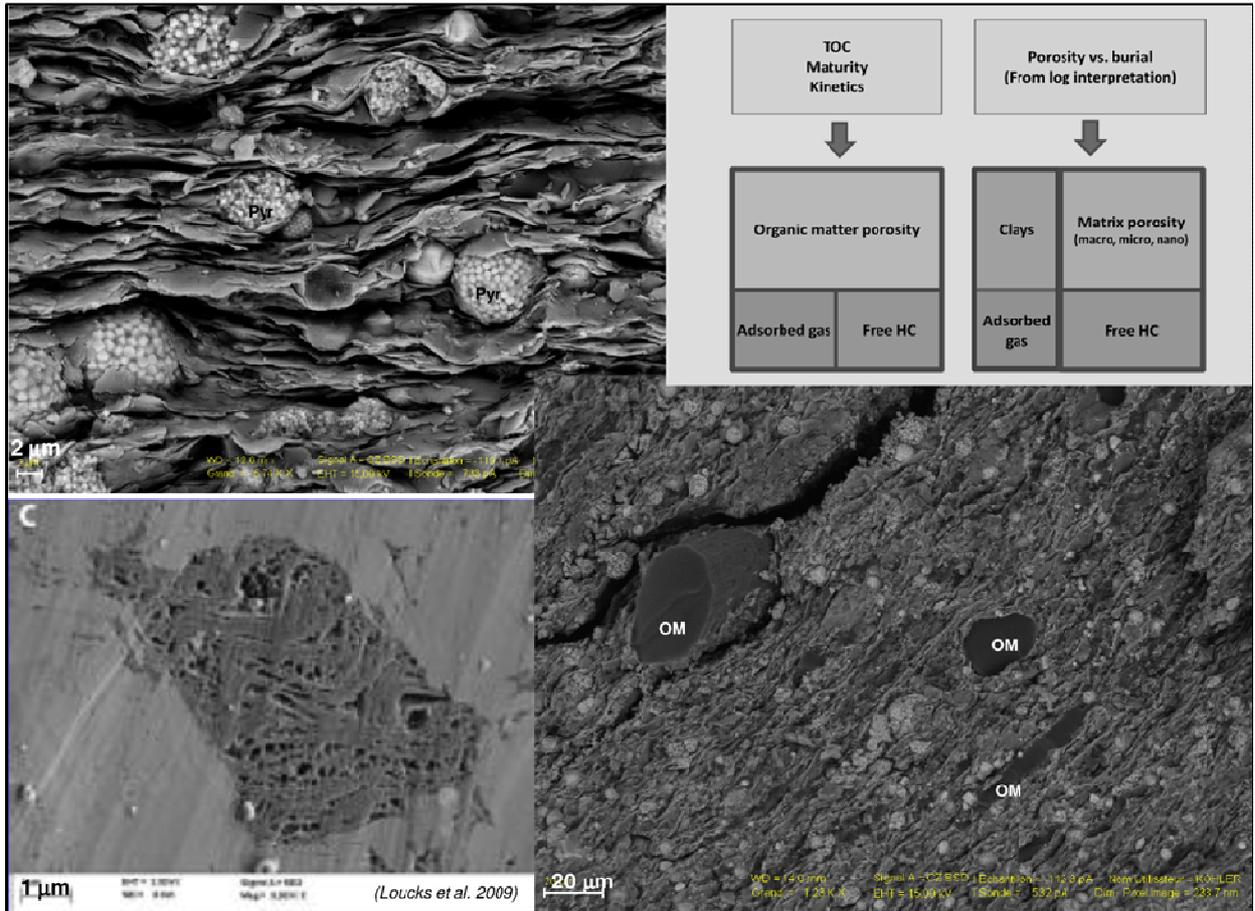


Figure 1: Illustration of the different porosity that can store gas

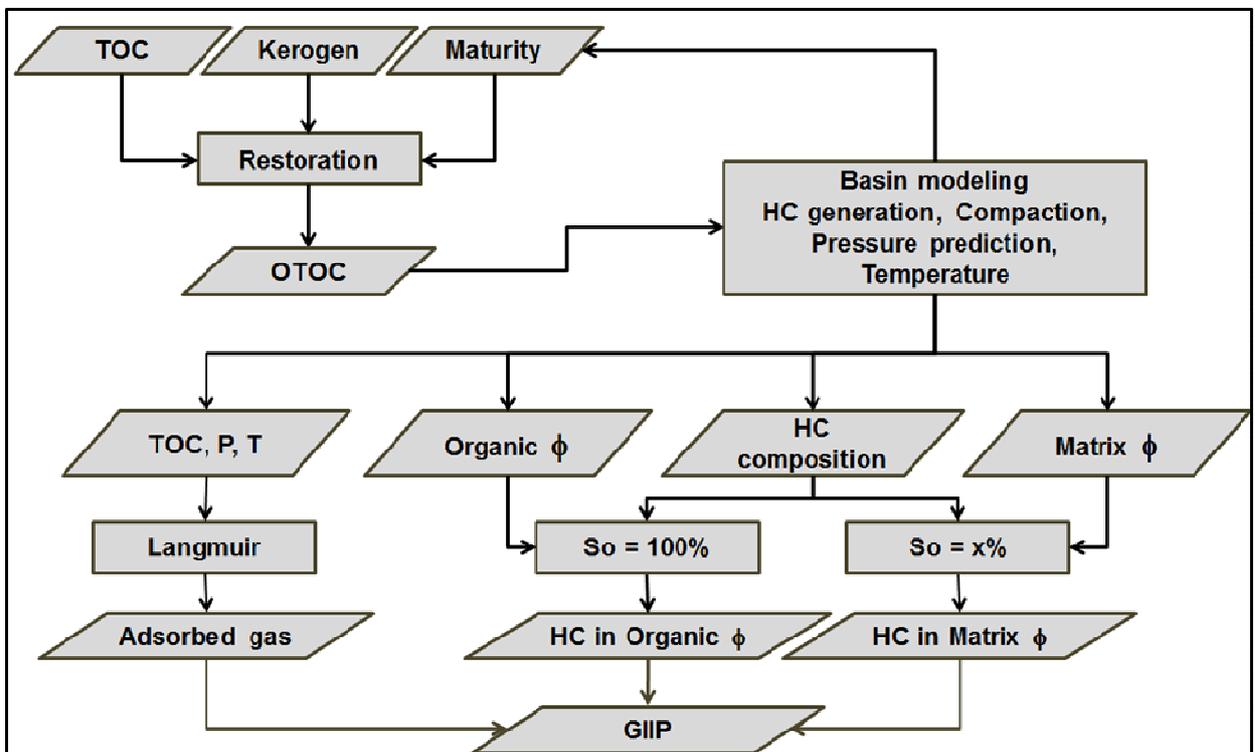


Figure 2: Workflow based in basin modeling used to assess the shale gas potential

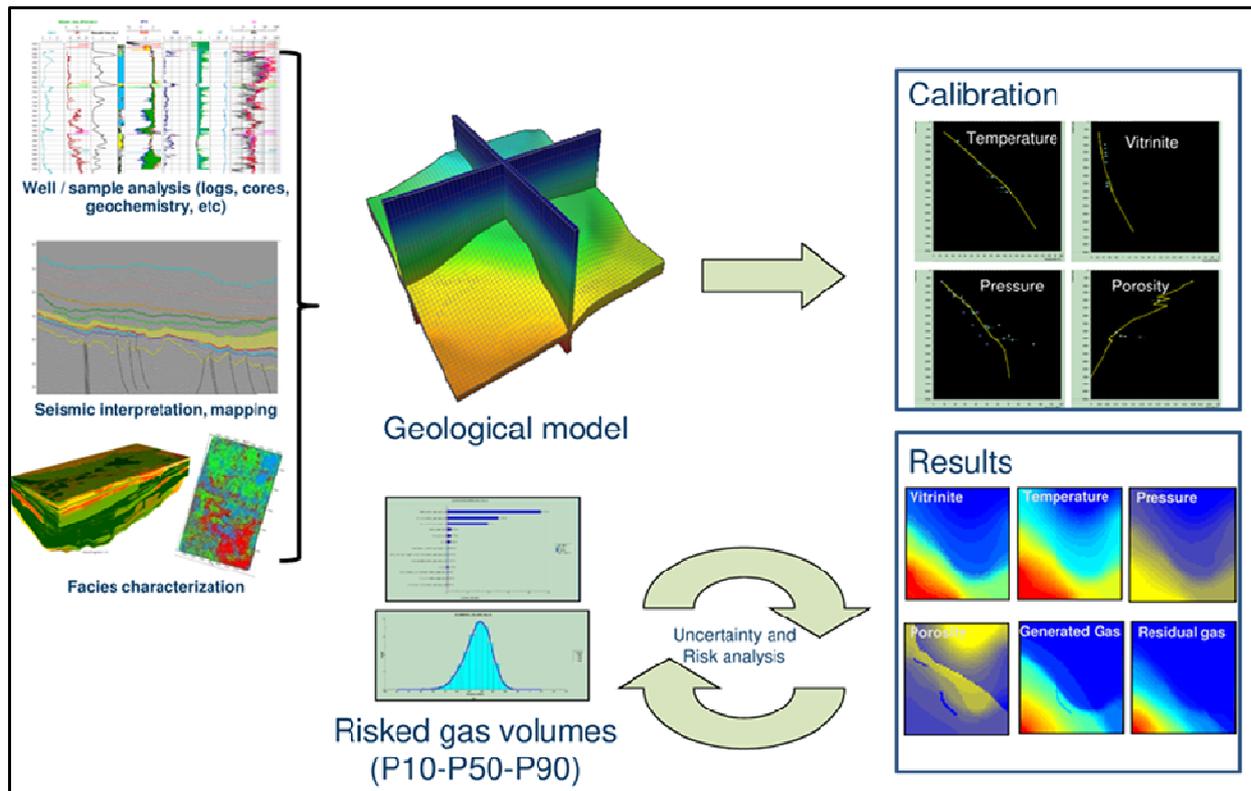


Figure 3: Illustration of the workflow based in basin modeling used to assess the shale gas potential